

GALILEO

from 1000 VA — to 3000 VA



On-line 1-Phase UPS with Tower and Rack/Tower convertible design ideal for small and medium businesses, networks and servers.


Features and benefits

- On-line double conversion UPS from 1000 to 3000 VA, Tower and 2U Rack/Tower from three to six output receptacles (IEC 320-C13) and one or two Schuko.
- Rack/Tower convertible design to protect your investment when migrating from tower to rack-mount environment. Both UPS and display panel can be rotated.
- Easy installation and set up, user-replaceable and upgradable battery.
- Intuitive LCD display providing easy-to-read UPS status and power information.
- Audible alarm alerts upon utility power and UPS status change.
- Smart cooling system ensuring further energy savings.
- Programmable switched outlet group for setting load priorities.
- Active harmonic power quality control ensuring up to 0.99 input PF and THDi<3% for maximum compatibility with sources.
- Automatic self test and advanced battery management maximizing battery performance and extending battery life.
- Remote power off for immediate UPS shutdown in case of emergency.
- USB communication port providing UPS management.
- One slot auto-sensing communication cards.
- Cold start for powering loads when mains are not available.
- Borri Power Guardian user-friendly UPS management software with alerts upon main power failures and system shutdown notification via SMS and email, free downloadable at www.borri.it/download (for more info see p.20/21).


Main options

- SNMP card to send UPS status to BMS's by Ethernet connection and SNMP or ModBus over IP protocol to monitor UPS status by any internet browser from workstations and to receive SMS or e-mail alerts from the UPS on any portable device.
- Contact relay card to send UPS status to PLC's, SCADA's or AS400's by voltage free SPDT contacts.
- Battery extension box allowing additional autonomy time to be quickly added.
- Additional battery charger for external battery box.
- Rail kit Rack/Tower.
- Rack PDU with external sockets and manual bypass switch.

Back up time for Rack/Tower UPS

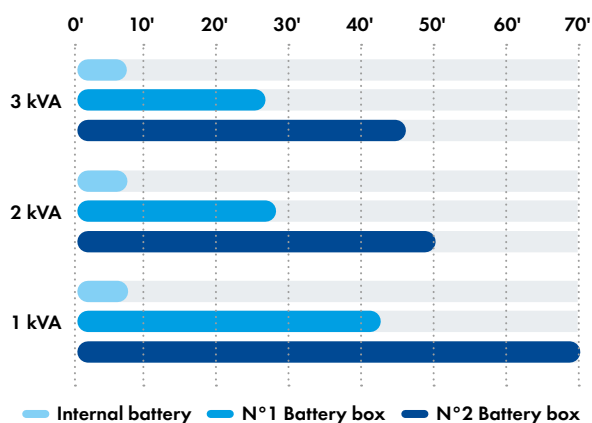

Back up time for Tower UPS

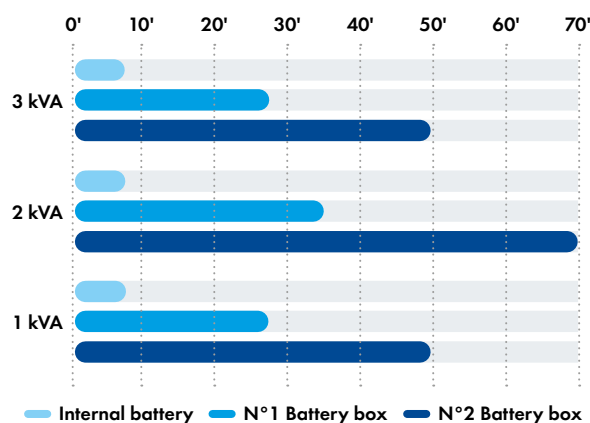

GALILEO technical data

UPS Type	T *	T *	T *	RT (2U) **	RT (2U) **	RT (2U) **	
Rating (VA)	1000	2000	3000	1000	2000	3000	
Nominal Power (W)	900	1800	2700	900	1800	2700	
UPS dimensions WxDxH (mm)	144x367x236	151x444x322	189x444x322	440x390x88	440x475x88	440x600x88	
UPS weight (kg)	11.2	18.8	24.9	12.0	17.0	26.5	
Input							
Connection type	IEC 320-C14		IEC 320-C20	IEC 320-C14		IEC 320-C20	
Nominal voltage	230 Vac 1-phase						
Voltage range	195 to 260 Vac						
Frequency and range	50/60 Hz, 45 to 65 Hz						
Power factor	0.98			0.99			
Current distortion (THDi)	<3%						
Output							
Connection type	3 IEC 320-C13 1 Schuko	3 IEC 320-C13 2 Schuko	6 IEC 320-C13 2 Schuko	3 IEC 320-C13	6 IEC 320-C13		
Nominal voltage	230 Vac +/-1% 1-phase						
Frequency	50/60 Hz						
Power factor	Up to 0.9, without power derating						
Overload capability	105% continuous, 120% for 30 seconds, 150% for 10 seconds, >150% transfer to bypass						
Mode of operation	On-line, Eco mode						
Battery							
Autonomy time internal battery (min.) 	50% load	12	13	15	12	13	15
	100% load	6	6	6	6	6	6
Connectivity and function extensions							
Front panel	Display LCD, status LED, function keys						
Communication	Included: USB, EPO, RS232. Optional: dry contact card, SNMP card. Compatible platforms: Windows, Linux, Mac						
Environmental							
Operating temperature range	0°C to +40°C						
Altitude (AMSL)	< 1000 m without power reduction, > 1000 m with reduction of 0.5% per 100 m						
Audible noise at 1 m (dBA)	< 50						
Standards and certifications							
Quality assurance, environment, health and safety	ISO 9001:2015, ISO 14001:2015, BS OHSAS 18001:2007						
Safety	IEC/EN 62040-1						
EMC	IEC/EN 62040-2						
Marking	CE						

*Tower **Rack/Tower ◇ Measurement conditions: optimised parameters, fully charged battery, 0.7 PF

